


Two-Hand Sanders

Clayton two-hand sanders are a great choice for coatings removal and surface preparation. These sanders are designed for outstanding power and dust extraction. The two hand design incorporates cutting edge ergonomics, and will quickly become the tool of choice for long sanding jobs. The sanders include a sticky outer skin and reversible right angle handle, both of which provide maximum comfort and reduce fatigue.

Sanders include:

- J-Hook backup pad for hook & loop abrasives
- Swivel adapter for 1" vacuum hose
- ¼" Air Inlet
- Reversible right angle handle
- CE certified

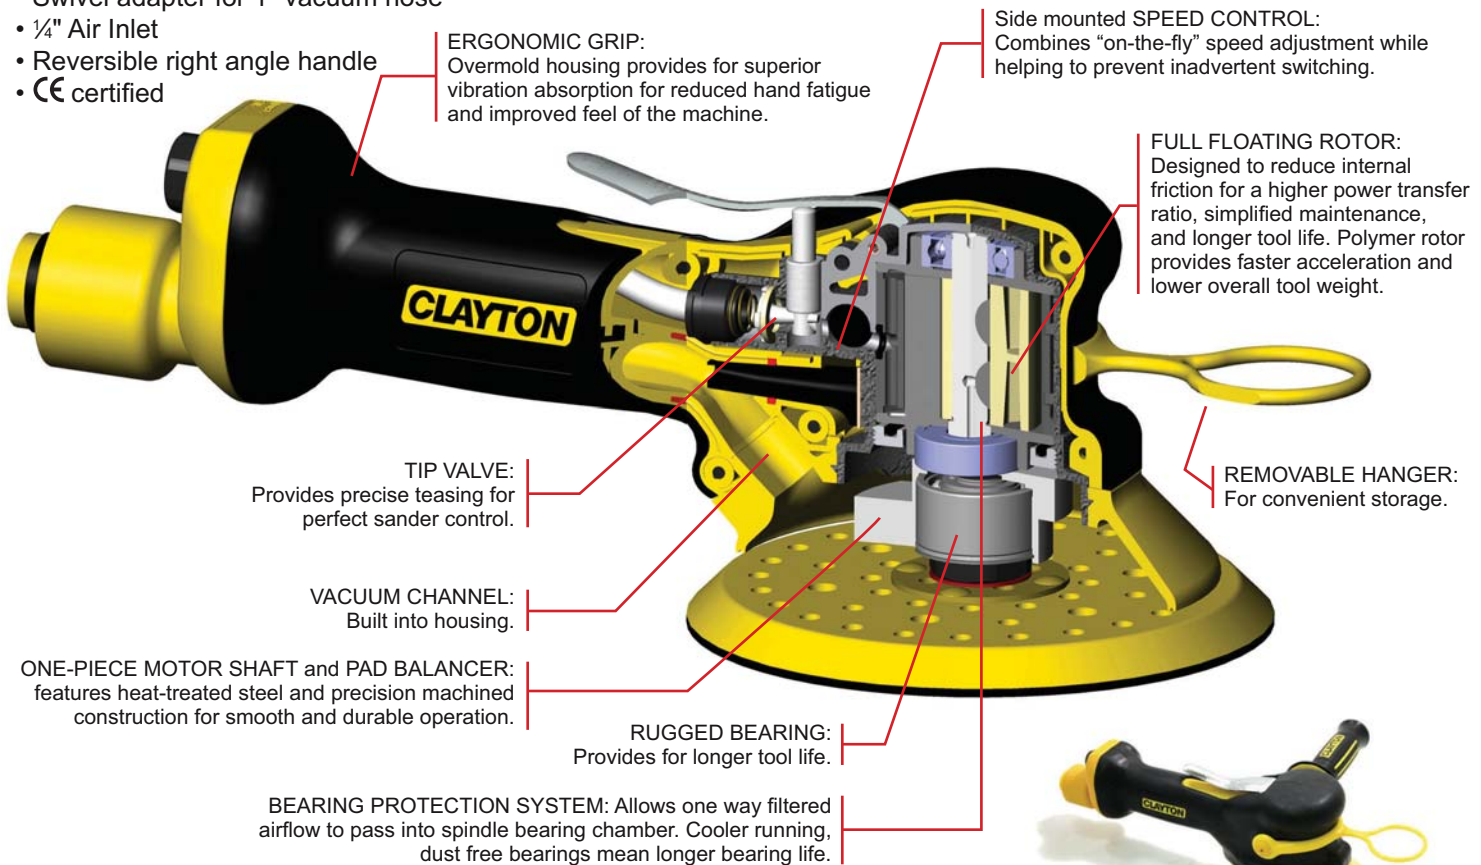

5" Two-Hand Sanders (125mm)

Model	NSN	Exhaust	Orbit inch (mm)	Motor HP (W)	Sound dBA	Air Consumption CFM (LPM)	Weight lbs (kg)	Price
676-12501J		Standard	3/16 (5)	0.45 (336)	79	22 (623)	2.7 (1.22)	
676-12521J		Standard	3/8 (10)	0.45 (336)	79	22 (623)	2.7 (1.22)	

6" Two-Hand Sanders (150mm)

Model	NSN	Exhaust	Orbit inch (mm)	Motor HP (W)	Sound dBA	Air Consumption CFM (LPM)	Weight lbs (kg)	Price
676-12601J		Standard	3/16 (5)	0.45 (336)	79	22 (623)	2.9 (1.29)	
676-12621J		Standard	3/8 (10)	0.45 (336)	79	22 (623)	2.9 (1.29)	

8" Two-Hand Sanders (200mm)

Model	NSN	Exhaust	Orbit inch (mm)	Motor HP (W)	Sound dBA	Air Consumption CFM (LPM)	wWeight lbs (kg)	Price
676-12801J		Standard	3/16 (5)	0.46 (343)	79	22 (623)	3.6 (1.61)	

- ① All tool performance ratings measured @ 90 PSI (620 kPa) compressed air pressure.
- * Available on GSA Advantage website @ www.GSAadvantage.gov
- ^ This item has an NSN - See Model / NSN table on page 4.