


**Belt Sander Shroud** (sold with or without Dotco sander)

Our Tool Specific Belt Sander Shroud complements a 12K RPM 6" x 1/2" Dotco belt sander.

The shroud does not obscure the working edges of the abrasive belt, so users can easily see the work surface and get into tight areas.

Every shroud includes: 2' x 1" hose whip and swivel adapter for connection to 1" vacuum hoses. Refer to hose and fitting section for other hose adapters.

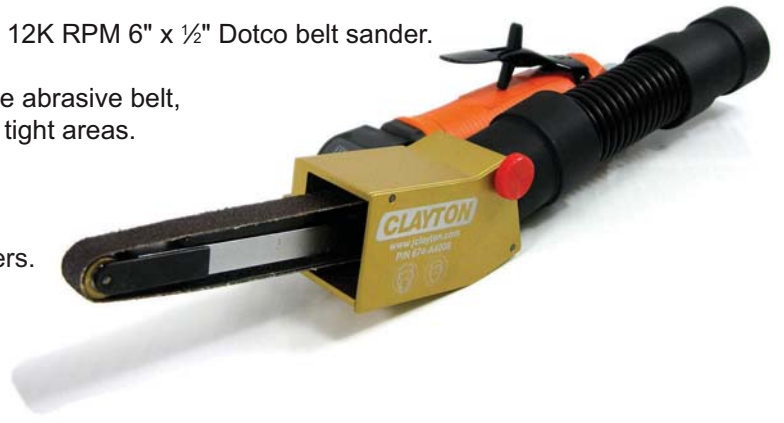

**Features**

- Compact 6" arm accepts 1/2" x 12" belts
- Precision finished anodized aluminum housing
- Shroud does not obscure visibility
- Shroud swivels on tool with sander belt
- Positive Lock hose fitting – hoses won't pull free

**1/2" Belt Sander Shroud for Dotco (13mm)**


Model	NSN	Belt Size	Sander	Orientation	Motor RPM	Motor HP (W)	Air Inlet ID inch (mm)	Weight lbs (kg)	Price
674-A4008		-	Not Included	-	-	-	-	-	
690-74008		1/2" (12)	Dotco 12L1280-36B2		12,000	0.3 (220)	1/4"	1.4 (0.6)	

**1/2" Belt Sander Shroud for Ingersoll Rand (model CA120RS812 or G1A120RS812)**

Model	NSN	Belt Size	Sander	Orientation	Motor RPM	Motor HP (W)	Air Inlet ID inch (mm)	Weight lbs (kg)	Price
674-A4108		1/2" (12)	Not Included	-	-	-	-	-	

- ⚠ Never exceed the maximum operating speed of your abrasive.
- ★ Available on GSA Advantage website @ [www.GSAadvantage.gov](http://www.GSAadvantage.gov)
- ⤴ This item has an NSN - See Model / NSN table on page 4.



 Please call for other Tool & Shroud combinations that may be available.